

1

MXB

*	HCMXB-2RS232-BD	V1.00	0.15W	RS232 Modbus RTU/ASCII
➤ HCM511S HCMXB-2RS232-BD				
MXB				

读者对象

MXB

MXB

1.1

1.1.1

	⚠	
	⚠	
	⚠	
NOTE		/
➤		

1.1.2

	
☐ ☐ ☐	RUN STOP

	
☐ * ☐ ☐ --- --- ---	

	
☐	

	
☐	

2.2.2

24PIN	

2.2.3

--	--



2.2.4

2.3

3

3.1

g	15	
mm	18.6 (W) *51.1 (H)*36.1 (D)	
		0~50
		-25~75
		5~95%RH
		5~95% RH
		1m 2
		5 ~150 Hz
		3.5mm
		1.0g
		3
		± 4kV, ± 8kV
		± 2kV 5~100kHz
		± 2kV 5~100kHz
		- ± 500V -PE ± 500V
		15g 11ms 3
	/	2000 m (80kPa)
		IP20
		PPE

3.2

	DC 5V DC4.75V DC5.25V
	30mA DC5V

3.3

	2
	RS232
	COM Modbus
	100 WORD


	RTU/ASCII				
	1				
	9600 bps	19200 bps	38400 bps	57600 bps	115200 bps
	7	8	8		
	1				
	1	2			
	15m				

4


4.1

4.1.1


- 1 35mm
- DIN
- 2
- 3 10mm

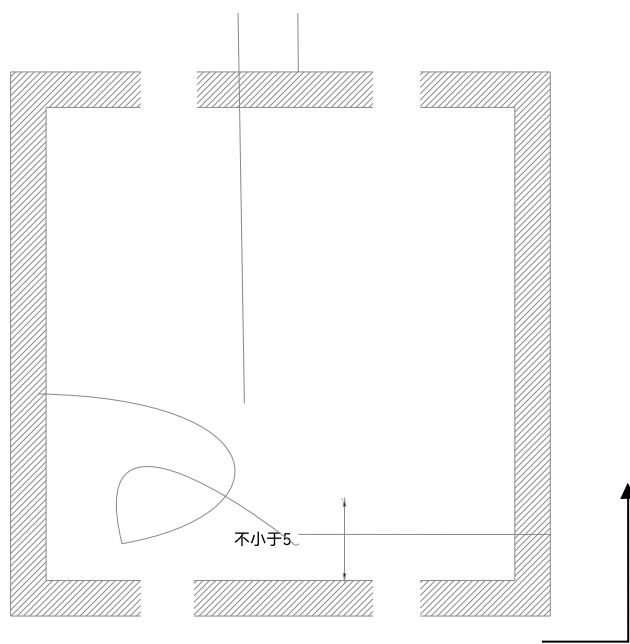

4.1.2

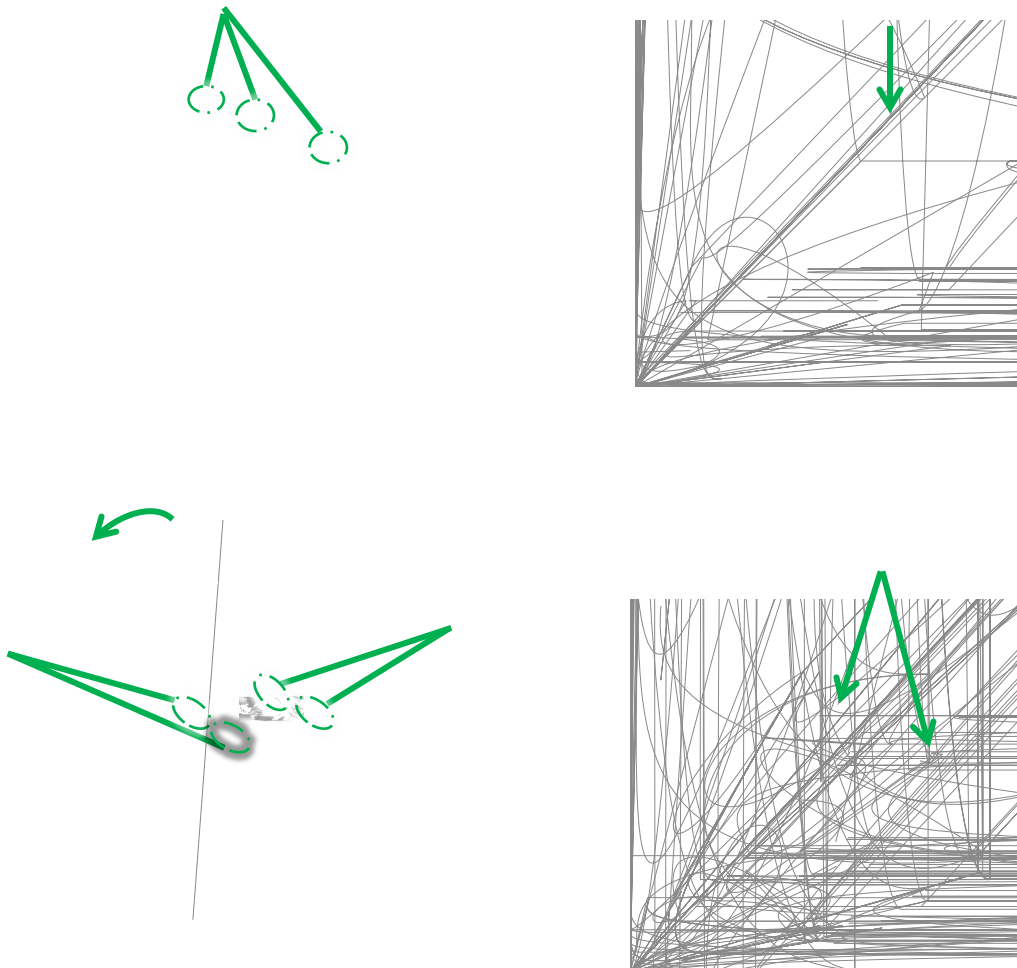

4.1.3

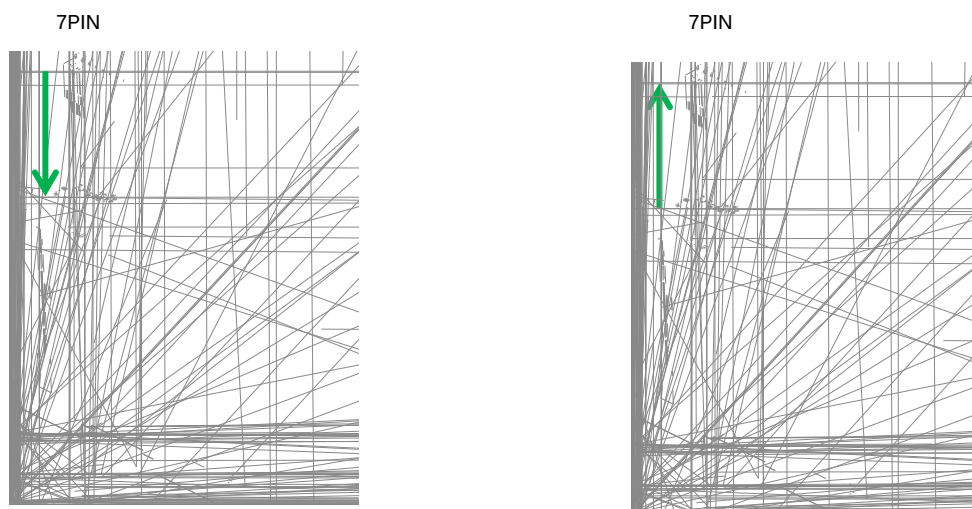


4.1.4

50N

50N


4.2.2

RS232

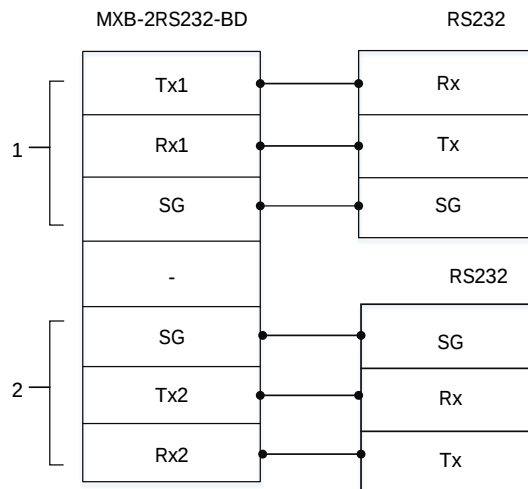


6 HCMXB-2RS232-BD


5 RS232

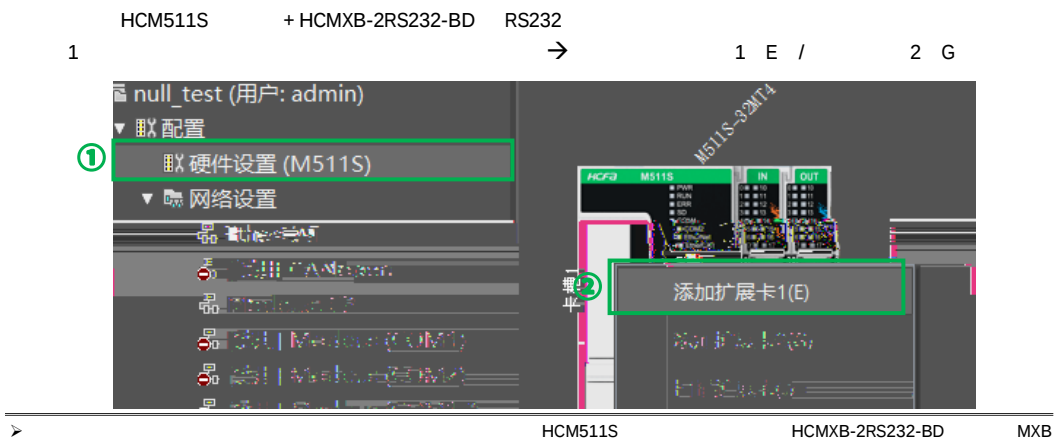

2 MXB-2RS232-BD

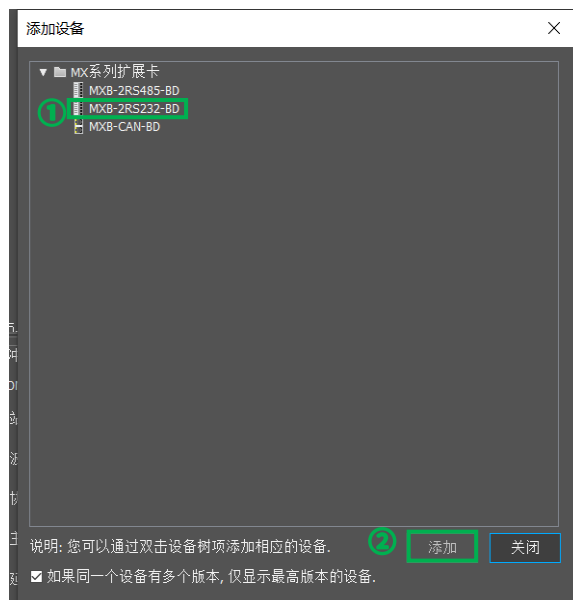

3 MXB-2RS232-BD COM 11 12
1 1~255 9600bps 7,E,1 ASCII

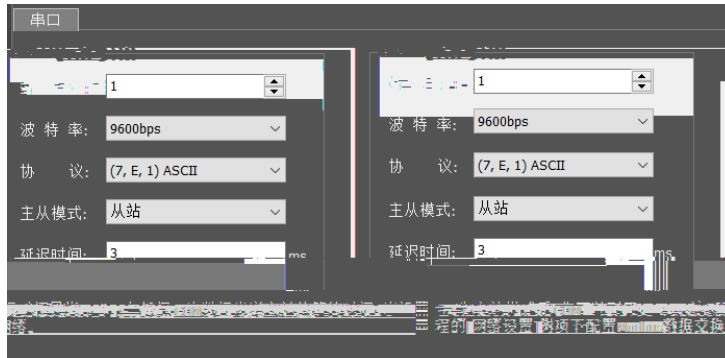

MXB-2RS232-BD COM 11 12
1 1~255 9600bps 7,E,1 ASCII

RS232



> E O N

4

